

Hiab Multilift

XR Power range hooklifts




TECHNICAL INFORMATION

XR14S

TECHNICAL DATA

TYPE	XR14S					
VEHICLE TYPE	2 axle					
GVW OF THE VEHICLE (t)	19					
CAPACITY (t)	14					
G-LENGTH	41	43	46	51	53	56
SYSTEM WEIGHT (kg) *	1600	1630	1660	1760	1840	1860
TIPPING ANGLE (°)	49	47	50	49	52	52
MAX. OPERATING PRESSURE (MPa)	30					
RECOMMENDED MAX. OIL FLOW (l/min)	60 (special 90)					

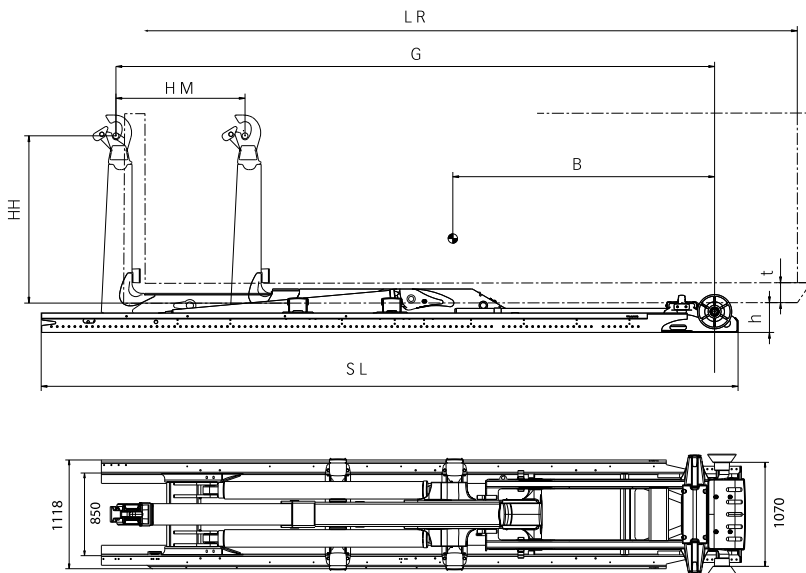

* Weight includes hydraulic body locking and excludes oil tank and oil.

** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.

*** Other hook heights for different body standards available.

Hiab Multilift equipments meet the demands set forth in the EU Machine Directive and they are CE marked.

We reserve the rights for modifications. Illustrations do not always show an equipment in standard version.

PRIMARY DIMENSIONS

MODEL	XR14S.41	XR14S.43	XR14S.46	XR14S.51	XR14S.53	XR14S.56
LR = BODY LENGTH (m) min - max	3,5 - 5,1	3,7 - 5,3	4,0 - 5,6	4,3 - 6,1	4,5 - 6,4	4,5 - 6,6
SL = SUBFRAME LENGTH (mm) **	4808	4958	5308	5758	6508	6508
B = CENTRE OF GRAVITY (mm)	2180	2290	2450	2700	2850	2950
G = EXACT G-LENGTH (mm)	4080	4270	4580	5080	5360	5560
HM = HORIZONTAL MOVEMENT (mm)	900	900	900	1100	1100	1300
t = MIN. FREE TUNNEL HEIGHT (body) (mm)	125					
h = INSTALLATION HEIGHT (mm)	230					
HH = HOOK HEIGHT (mm) ***	1570					

Cargotec improves the efficiency of cargo flows on land and at sea – wherever cargo is on the move. Cargotec's daughter brands Hiab, Kalmar and MacGregor are recognised leaders in cargo and load handling solutions around the world. Cargotec's global network is positioned close to customers and offers extensive services that ensure the continuous, reliable and sustainable performance of equipment. www.cargotec.com



Cargotec Finland Oy
 Nesteentie 36, P.O.Box 39
 21201 Raisio, Finland
 tel. +358 204 55 2399
 fax +358 204 55 2231
www.hiab.com