

Hiab Multilift

# XR Power range hooklifts




TECHNICAL INFORMATION

# XR16S

## TECHNICAL DATA

TYPE	XR16S					
VEHICLE TYPE	3 axle					
GVW OF THE VEHICLE (t)	26					
CAPACITY (t)	16					
G-LENGTH	46	51	53	56	59	61
SYSTEM WEIGHT (kg) *	1740	1840	1920	1940	1990	2010
TIPPING ANGLE (°)	50	49	52	52	52	49
MAX. OPERATING PRESSURE (MPa)	30					
RECOMMENDED MAX. OIL FLOW (l/min)	80 (special 120)					

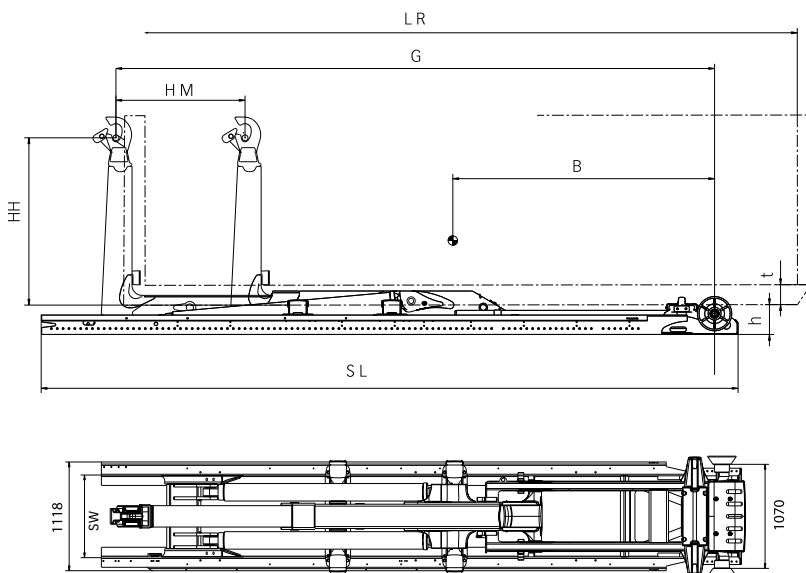

\* Weight includes hydraulic body locking and excludes oil tank and oil.

\*\* The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.

\*\*\* Other hook heights for different body standards available.

Hiab Multilift equipments meet the demands set forth in the EU Machine Directive and they are CE marked.

We reserve the rights for modifications. Illustrations do not always show an equipment in standard version.

## PRIMARY DIMENSIONS

MODEL	XR16S.46	XR16S.51	XR16S.53	XR16S.56	XR16S.59	XR16S.61
LR = BODY LENGTH (m) min - max	4,0 - 5,6	4,3 - 6,1	4,5 - 6,4	4,5 - 6,6	4,7 - 6,9	4,9 - 7,1
SL = SUBFRAME LENGTH (mm) **	5308	5758	6508	6508	6508	6758
SW = SUBFRAME INSTALLATION WIDTH (mm)	850	850	850	850	852	852
B = CENTRE OF GRAVITY (mm)	2450	2700	2850	2950	3000	3150
G = EXACT G-LENGTH (mm)	4580	5080	5360	5560	5860	6080
HM = HORIZONTAL MOVEMENT (mm)	900	1100	1100	1300	1450	1450
t = MIN. FREE TUNNEL HEIGHT (body) (mm)	125				105	
h = INSTALLATION HEIGHT (mm)	230				250	
HH = HOOK HEIGHT (mm) ***	1570					

Cargotec improves the efficiency of cargo flows on land and at sea – wherever cargo is on the move. Cargotec's daughter brands Hiab, Kalmar and MacGregor are recognised leaders in cargo and load handling solutions around the world. Cargotec's global network is positioned close to customers and offers extensive services that ensure the continuous, reliable and sustainable performance of equipment. [www.cargotec.com](http://www.cargotec.com)



**Cargotec Finland Oy**  
 Nesteentie 36, P.O.Box 39  
 FI-21201 Raisio, Finland  
 tel. +358 204 55 2399  
 fax +358 204 55 2231  
[www.hiab.com](http://www.hiab.com)